


SE200 – The Professional 2 Channel DVR for the Soho Market



ScopusEye is proud to announce the launching of the Home Video Gateway

- 2 Video Channels
- High quality local recording and transmitting
- PTZ for Camera Control
- Live video streaming over all networks: cellular, phone, ADSL, Cable and LAN
- View video over cellphones and PDA's
- Dry contacts (Panic button) - 6 input 2 output
- Low Power Consumption
- **Price Competitive**

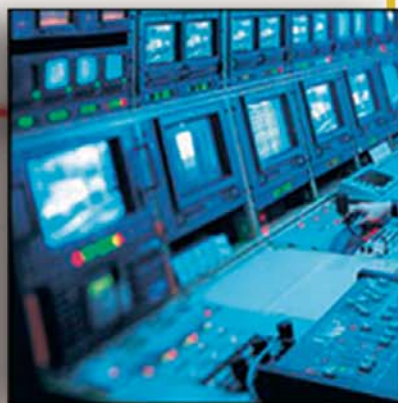

SE200 Series

SE200 SERIES TECHNICAL SPECIFICATION	
MODEL	SE200-F, SE200-HD
VIDEO INPUT	
Standard	PAL/NTSC
Video channels	2
Resolution	Dual resolution: 320x240 (SIF), or 160x120 (QSIF)
Compression	MPEG-4
Compressed data rates	9 kbps to 1 Mbps, user configurable
PTZ control	2 ports; RS-232/RS-485 each
PTZ protocol	Variety of common protocols (Pelco D, Pelco A)
Audio channels*	2
Encryption*	Triple Des encryption
COMMUNICATION	
Network connectivity	Built-in 10/100 Base-T Ethernet suitable for Cable/xDSL Optional: internal GPRS/CDMA/PSTN/ISDN/Cellular interface support, external Wi-Fi adaptor*
Maintenance	Basic configuration - Web Administration Advanced configuration - PC/Windows Software
External Network Support	Proxy - remote access for data configuration DDNS Support - direct external extensions
IP assignment	Dynamic/static
RECORDING	
Mode	24/7 or event-driven
HD type	IDE interface Option for flash recording pre & post alarm, 15 seconds or HD recording
HD size	Default: compact flash 2.5", 40GB (optional up to 120GB)
EVENT HANDLING & OUTPUT	
Storage	1 GB per day per camera at resolution SIF 10fps
Event type	External sensor input, video motion detection, disk full, video loss
Action type	Local recording, host notification, SMS, email notification*
Motion detection	Threshold control, area of interest, exclude areas
I/O	
Input channels	6 Opto-isolated inputs
Output channels	2 Opto-isolated activators
POWER	
Voltage input	5V DC
Max. power consumption	5W
OPERATING ENVIRONMENT	
Ambient temperature	0°C - 45°C; 32°F - 113°F
Relative humidity	< 85%
MECHANICAL DESIGN	
Dimension	185(W) x 158(D) x 55(H) mm; 7.4"(W) x 6.2"(D) x 2.16"(H)
Weight	1(kg) [1.5 (kg) - incl. HDD]; 2.20 (lbs) [3.30 (lbs) - incl. HDD]

* Coming Soon!

